



Material No.: Code:
1.3343 HS6-5-2C

DE - Brand:
DMO5

Chemical composition:
(Typical analysis in %)

C	Cr	Mo	V	W			
0,90	4,00	5,00	1,90	6,40			

Steel properties:

High-speed steel, high strength at elevated temperatures, good toughness, high compressive strength, good wear resistance. Similar to AISI M2.

Applications:

Standard material for machining tools, e.g. drill bits, milling cutters, screw dies, broaches, inserts for circular saw blades. slotting tools and wood working tools. In addition cold forming tools e.g. cutting and blanking tools, cold extrusion punches and dies. Excellent base material for PVD/CVD coating.

Condition of delivery:

Soft annealed to max. 269 HB


Physical properties:

Thermal expansion coefficient	$\left[\frac{10^{-6} \cdot \text{m}}{\text{m} \cdot \text{K}} \right]$	20-100°C	20-200°C	20-300°C	20-400°C
		10,8	11,8	12,0	12,5
Thermal conductivity	$\left[\frac{\text{W}}{\text{m} \cdot \text{K}} \right]$	20°C	350°C	700°C	
		27,6	27,2	26,1	


Heat treatment:

Soft annealing	<table border="1"><thead><tr><th>Temperature</th><th>Cooling</th><th>Hardness</th></tr></thead><tbody><tr><td>780 - 860°C</td><td>furnace</td><td>max. 269 HB</td></tr></tbody></table>	Temperature	Cooling	Hardness	780 - 860°C	furnace	max. 269 HB
Temperature	Cooling	Hardness					
780 - 860°C	furnace	max. 269 HB					
Stress relief annealing	<table border="1"><thead><tr><th>Temperature</th><th>Cooling</th><th></th></tr></thead><tbody><tr><td>600 - 650°C</td><td>furnace</td><td></td></tr></tbody></table>	Temperature	Cooling		600 - 650°C	furnace	
Temperature	Cooling						
600 - 650°C	furnace						
Hardening	<table border="1"><thead><tr><th>Temperature</th><th>Cooling</th><th>Tempering</th></tr></thead><tbody><tr><td>1180 - 1230°C</td><td>oil, pressure gas (N₂), air or hot bath 500 - 550°C</td><td>see tempering diagram</td></tr></tbody></table>	Temperature	Cooling	Tempering	1180 - 1230°C	oil, pressure gas (N ₂), air or hot bath 500 - 550°C	see tempering diagram
Temperature	Cooling	Tempering					
1180 - 1230°C	oil, pressure gas (N ₂), air or hot bath 500 - 550°C	see tempering diagram					


(1.3343) Thermal Cycle Diagram

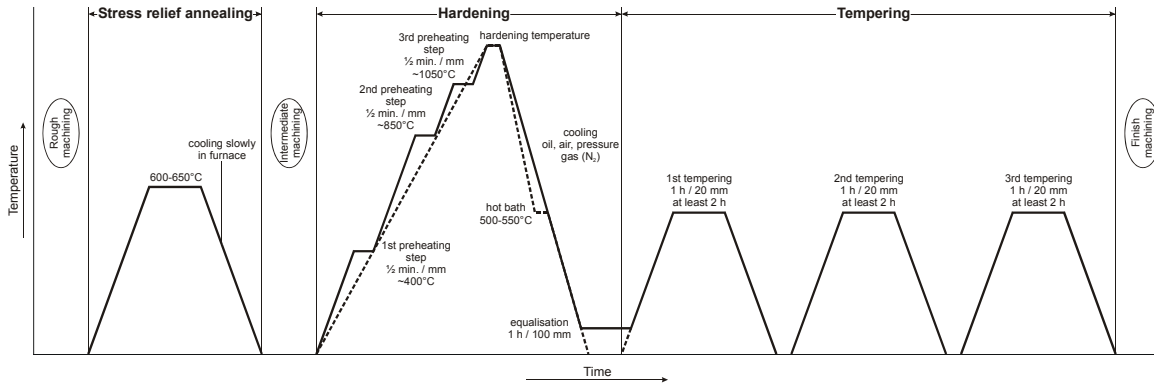

Continuous Cooling Transformation Diagram (CCT)

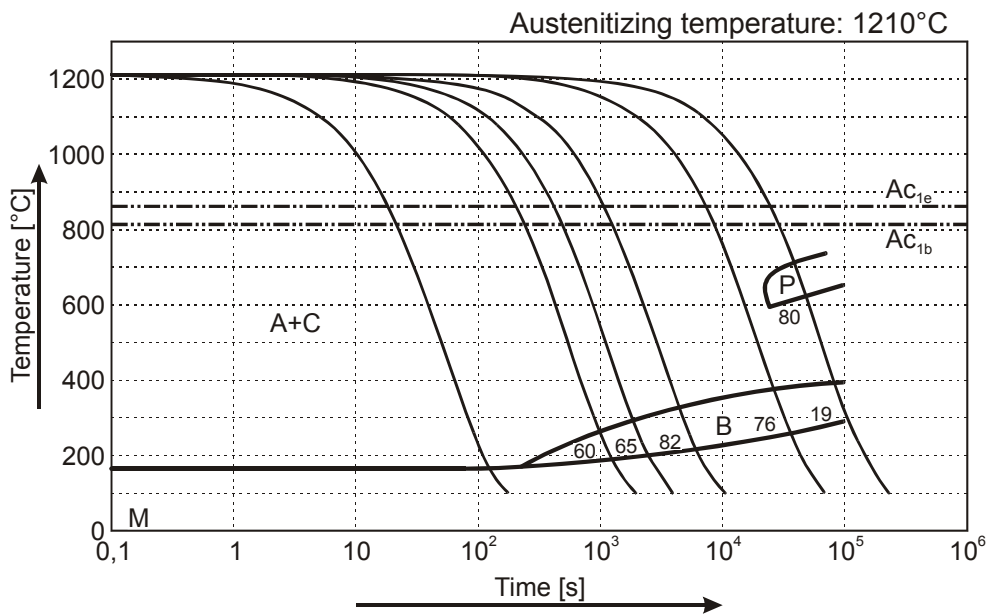

Tempering Diagram

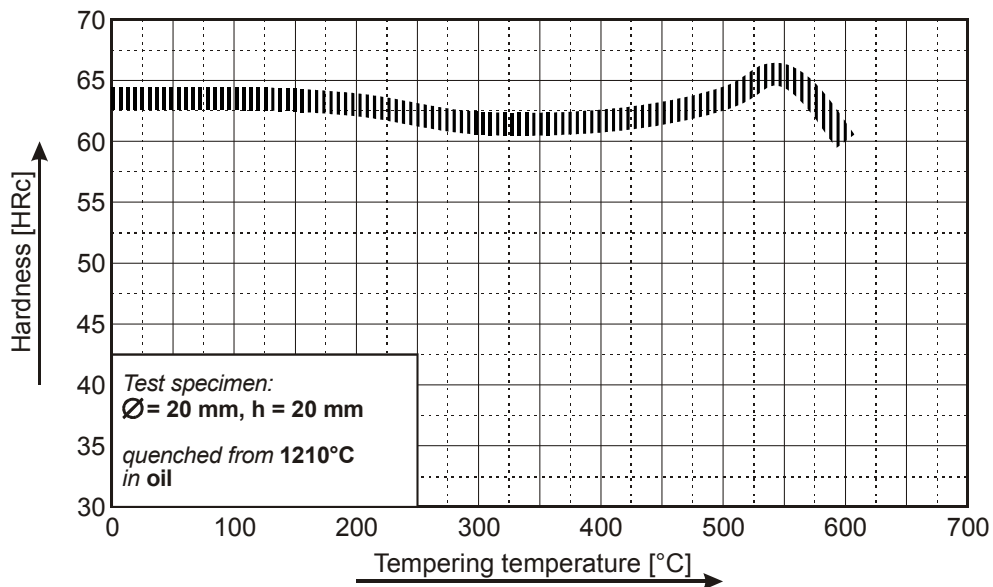

Remarks: All technical information is for reference only.